

# SPECIFICATION

PYROELECTRIC PASSIVE  
INFRARED SENSOR

MODEL           PMS11-P          

TYPE: PMS11-P

PAGE: 1 /6

CHART:

EDITION: A

ASSEMBLY:

SHANGHAI NICERA SENSOR CO.,LTD

**TYPE OF SENSOR**

SINGLE ELEMENT

**PHYSICAL CONFIGURATION**

- (1) PACKAGE TO-5 METAL CAN  
SEE FIGURE A
- (2) ELEMENT SIZE  $\Phi 1.8$  mm
- (3) LEAD CONFIGURATION SEE FIGURE B,C

**ELECTRICAL CHARACTERISTICS** (AT  $25\pm 5^{\circ}\text{C}$ )

- (1) CIRCUIT CONFIGURATION SEE FIGURE D
- (2) OPERATION VOLTAGE 2.2~15 V DC (Drain-Ground)  
( $R_s: 47\text{K}\Omega$ )
- (3) SOURCE VOLTAGE 0.4~1.1 V ( $V_D=10\text{V}, R_s=47\text{K}\Omega$ )
- (4) SIGNAL OUTPUT Min 2.0 Vp-p (Source-Ground)  
(FIRE TEMPERATURE  
CHOPPER FREQUENCY 1Hz:  
MEASUREMENT AMP. 0.3~3.0Hz、  
72.5db(AT 1Hz))  
SEE FIGURE F

TYPE: PMS11-P

PAGE: 2 /6

CHART:

EDITION: A

ASSEMBLY:

SHANGHAI NICERA SENSOR CO.,LTD

## OPTICAL CHARACTERISTICS

- (1) FIELD OF VIEW 88 °  
SEE FIGURE G
- (2) WINDOW MATERIAL White Gem  
Wave Length<sub>p-p</sub> 4.35 μ m  
Half Width 180nm  
Thickness 0.39 mm

## ENVIRONMENTAL REQUIREMENTS

- (1) OPERATING TEMPERATURE - 20 ~ + 50 °C  
(2) STORAGE TEMPERATURE - 30 ~ + 60 °C

## APPLICATION

FIRE DETECTION

### ※ NOTES

#### 1. DESIGN RESTRICTIONS/PRECAUTIONS

FOR OUTDOOR APPLICATIONS , BE SURE TO APPLY SUITABLE SUPPLEMENTARY OPTICAL FILTER AND DRIP-PROOF . ANTI-DEW CONSTRUCTION. THIS SENSOR IS DESIGNED FOR INDOOR USE. IN CASES WHERE SECONDRAY ACCIDENTS DEE TO OPERATION FAILURE OR MALFUNCTIONS CAN BE ANTICIPATED. ADD A FAIL SAFE FUNCTION TO THE DESIGN.

#### 2. USAGE RESTRICTIONS/PRECAUTIONS

TO PREVENT SENSOR MALFUNCTIONS, OPERATIONAL, FAILURE OR ANY DETERIORATION OF ITS CHARACTERISTICS. DO NOT USE THIS SENSOR IN FOLLOWING, OR SIMILAR, CONDITIONS.

- A. IN RAPID ENVIRONMENTAL TEMPERATURE CHANGES.
- B. IN STRONG SHOCK OR VIBRATION.
- C. IN A PLACE WHERE THERE ARE OBSTRUCTING MATERIALS (GLASS.FOGETC) THROUGH WHICH INFRARED RAYS CANNOT PASS WITHIN DETECTION AREA.
- D. IN FLUID. CORROSIVE GASES AND SEA BREEZE.

TYPE: PMS11-P

PAGE: 3 / 6

CHART:

EDITION: A

ASSEMBLY:

SHANGHAI NICERA SENSOR CO.,LTD

- E. CONTINUAL USE IN HIGH HUMIDITY ATMOSPHERE.
- F. EXPOSED TO DIRECT SUN LIGHT OR HEADLIGHTS OF AUTOMOBILES.
- G. EXPOSED TO DIRECT WIND FROM A HEATER OR AIR CONDITIONS.

3. ASSEMBLY RESTRICTIONS/PRECAUTIONS

SOLDERING-----

- A. USE SOLDERING IRONS WHEN SOLDERING.
- B. AVOID KEEPING PINS OF THIS HOT FOR A LONG TIME AS EXCESSIVE HEAT MAY CAUSE DETERIORATION OF ITS QUALITY.(E.G. WITHIN 5 SEC. AT 350°C)
- C. AVOID STATIC ELECTRICITY OR STRONG ELECTROMAGNETIC WAVES.

WASHING-----

- A. BE SURE TO WASH OUT ALL FLUX AFTER SOLDERING AS REMAINDER MAY CAUSE MALFUNCTIONS.
- B. USE A BRUSH WHEN WASHING. WASHING WITH AN ULTRASONIC CLEANER MAY CAUSE OPERATIONAL FAILURE.

4. HANDLING AND STORAGE RESTRICTIONS/PRECAUTIONS


TO PREVENT SENSOR MALFUNCTIONS, OPERATIONAL FAILURE. APPEARANCE DAMAGE OR ANY DETERIORATION OF ITS CHARACTERISTICS. DO NOT EXPOSE THIS SENSOR TO THE FOLLOWING OR SIMILAR, HANDLING AND STORAGE CONDITIONS.

- A. VIBRATION FOR A LONG TIME.
- B. STRONG SHOCK.
- C. STATIC ELECTRICITY OR STRONG ELECTROMAGNETIC WAVES.
- D. HIGH TEMPERATURE AND HUMIDITY FOR A LONG TIME.
- E. CORROSIVE GASES OR SEA BREEZE.
- F. DIRTY AND DUSTY ENVIRONMENTS THAT MAY CONTAMINATE THE OPTICAL WINDOWS.


SENSOR TROUBLES RESULTING FROM MISUSE. INAPPROPRIATE HANDLING OR STORAGE ARE NOT THE MANUFACTURER ' S RESPONSIBILITY.

TYPE: PMS11-P	PAGE: 4 /6	CHART:	EDITION: A
ASSEMBLY:	SHANGHAI NICERA SENSOR CO.,LTD		


TOP VIEW  
(FIGURE A)



SIDE VIEW  
(FIGURE B)




BASE VIEW  
(FIGURE C)

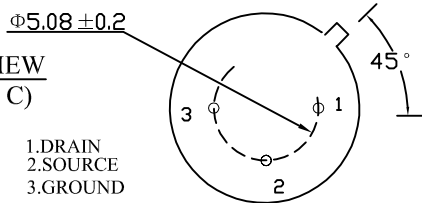


- 1.DRAIN
- 2.SOURCE
- 3.GROUND

CIRCUIT CONFIGURATION  
(FIGURE D)

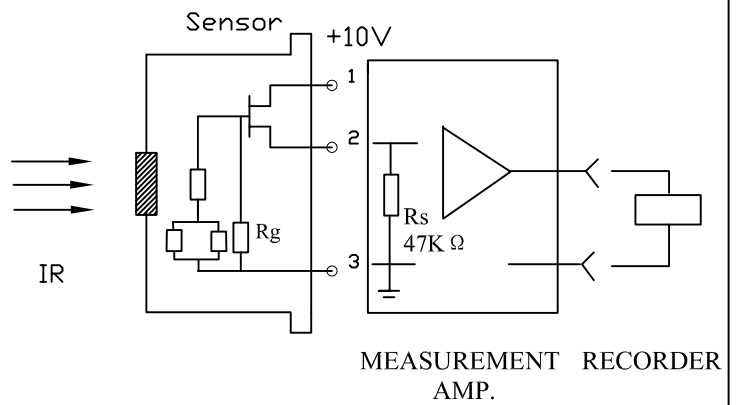

FIELD OF VIEW  
(FIGURE G)



TYPE: PMS11-P

PAGE: 5/6


CHART:

EDITION: A


ASSEMBLY:

SHANGHAI NICERA SENSOR CO.,LTD

TEST DIAGRAM  
(FIGURE E)

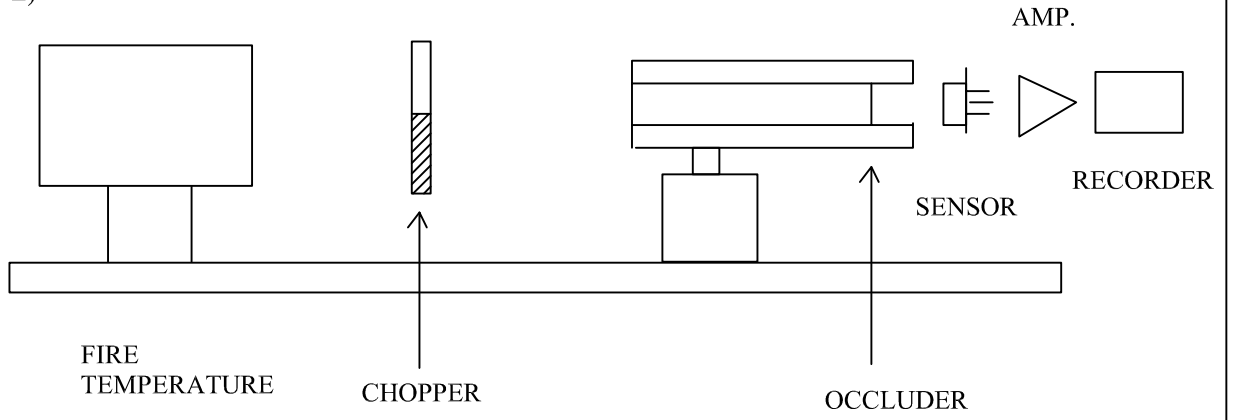

OCCLUDER POSITION



SIGNAL OUTPUT  
(FIGURE F)

TYPE: PMS11-P

PAGE: 6/6

CHART:

EDITION: A

ASSEMBLY:

SHANGHAI NICERA SENSOR CO.,LTD